







NIRO Kette Edelstahl Güteklasse 6

Table of Working Load Limit - chain grade 60 Stainless

G6-NIRO

	1 strängig 1 leg		2 strängig 2 legs				3 + 4 strängig 3 and 4 legs	
Neigungs- winkel β	0°	0°	0° - 45°	45° - 60°	0° - 45°	45° - 60°	0° - 45°	45° - 60°
Faktor	1	0,8	1,4	1	1,1	0,8	2,1	1,5
	direkt kg	geschnürt kg	direkt kg	direkt kg	geschnürt kg	geschnürt kg	direkt kg	direkt kg
Ketten- nenn- größe mm								
5-Niro	630	500	850	630	700	500	1.300	940
7-Niro	1.250	1.000	1.750	1.250	1.400	1.000	1.850	1.350
8-Niro	1.600	1.280	2.200	1.600	1.800	1.280	3.350	2.400
10-Niro	2.500	2.000	3.500	2.500	2.800	2.000	5.250	3.750
13-Niro	4.250	3.400	5.950	4.250	4.750	3.400	8.900	6.350
16-Niro	6.300	5.040	8.800	6.300	7.050	5.040	13.200	9.400

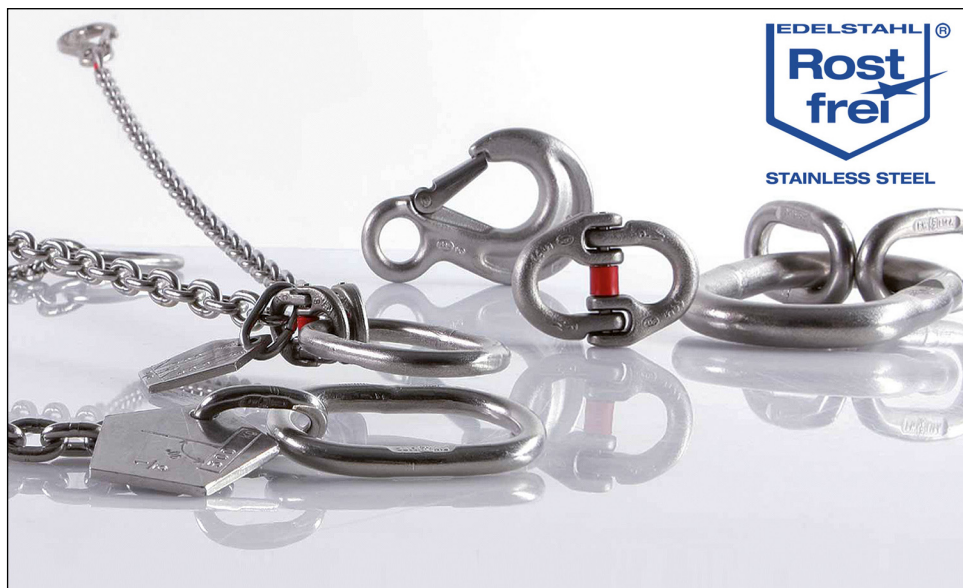

EDELSTAHL®
**Rost
frei**
STAINLESS STEEL